

# POLYETHYLENE BUOY


## GBP-1500

**Diameter: 1.5 m Volume: 0.8 m<sup>3</sup>**  
**For inland waterways, shallow waters and fast current areas**

*The GBP-1500, entirely made of virgin polyethylene is suitable for river beaconing.*


**Features:**

- Monobloc float in virgin polyethylene, UV stabilised and precompounded to reduce colour ageing, with standard wall thickness 8.5 mm and expanded polystyrene (EPS) foaming
- Twin keel design (ideal for fast current zones, up to 7 knots)
- Polyethylene spar: 0.75 high or 1.5m high depending on the required focal plane

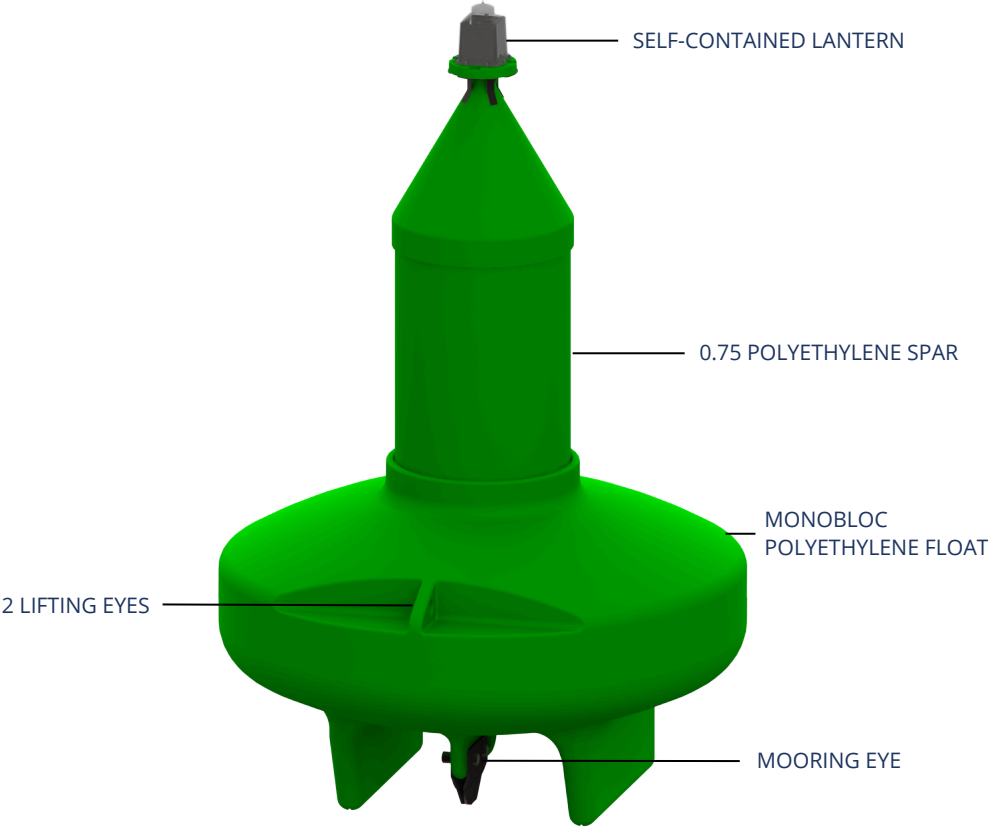

GBP-1500-0.75

**Configuration examples:**

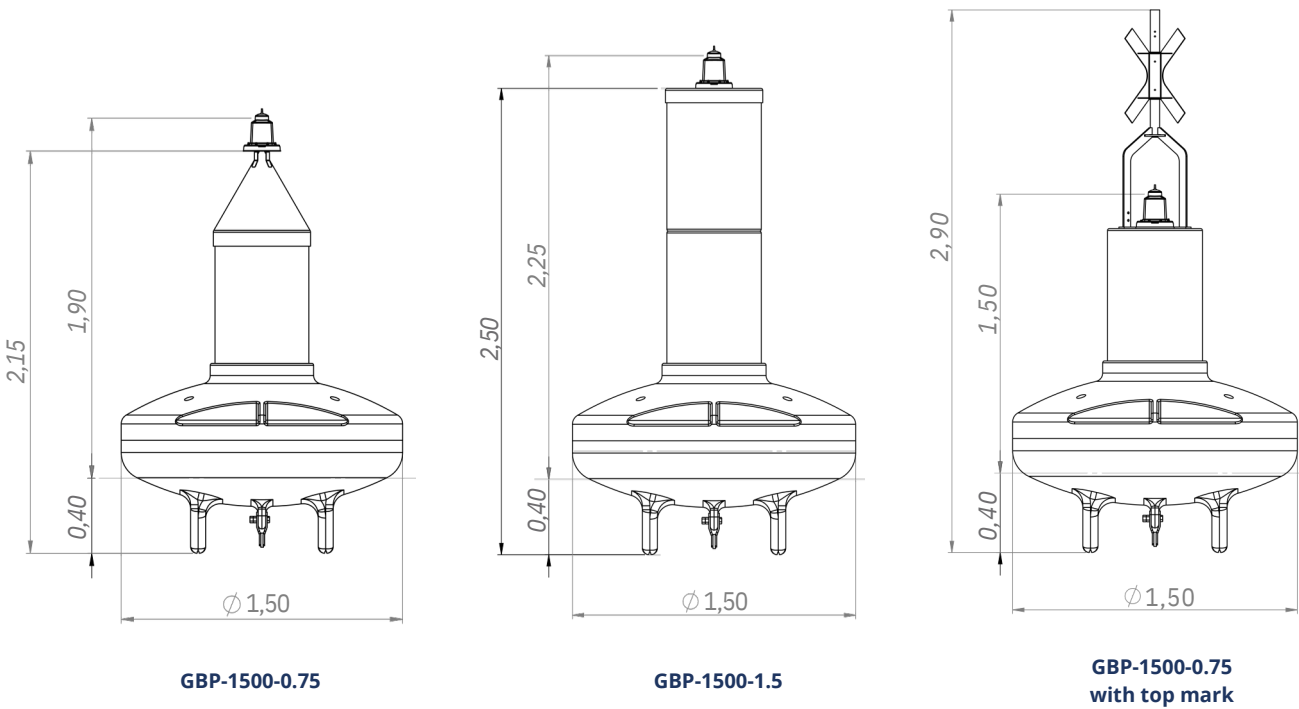

	GBP-1500-0.75	GBP-1500-1.5	GBP-1500-0.75 with top mark
Diameter (m)	1.5	1.5	1.5
Volume (m <sup>3</sup> )	0.8	0.8	0.8
Total weight (kg)	180	190	190
Reserve buoyancy (m <sup>3</sup> )	0.6	0.6	0.6
Draught (m)	0.40	0.40	0.40
Focal plane (m)	1.9 (with GSC-3)	2.25 (with GSC-3)	1.5 (with GSC-3)
Overall height (m)	2.15	2.50	2.90

Other configurations are available, please contact us at [contact@gisman.fr](mailto:contact@gisman.fr)

**Options available on request:**

- Echomax radar reflector
- Stickers & retro-reflective tape
- Top mark for version 0.75 only.

